


Concrete with a running slope between 5% and 8% will be the area of measurement for item "Handicap Ramp w/Truncated Domes." All other flatwork (or returned curbs) shall be paid at the rate of Concrete Sidewalk (4") Thick

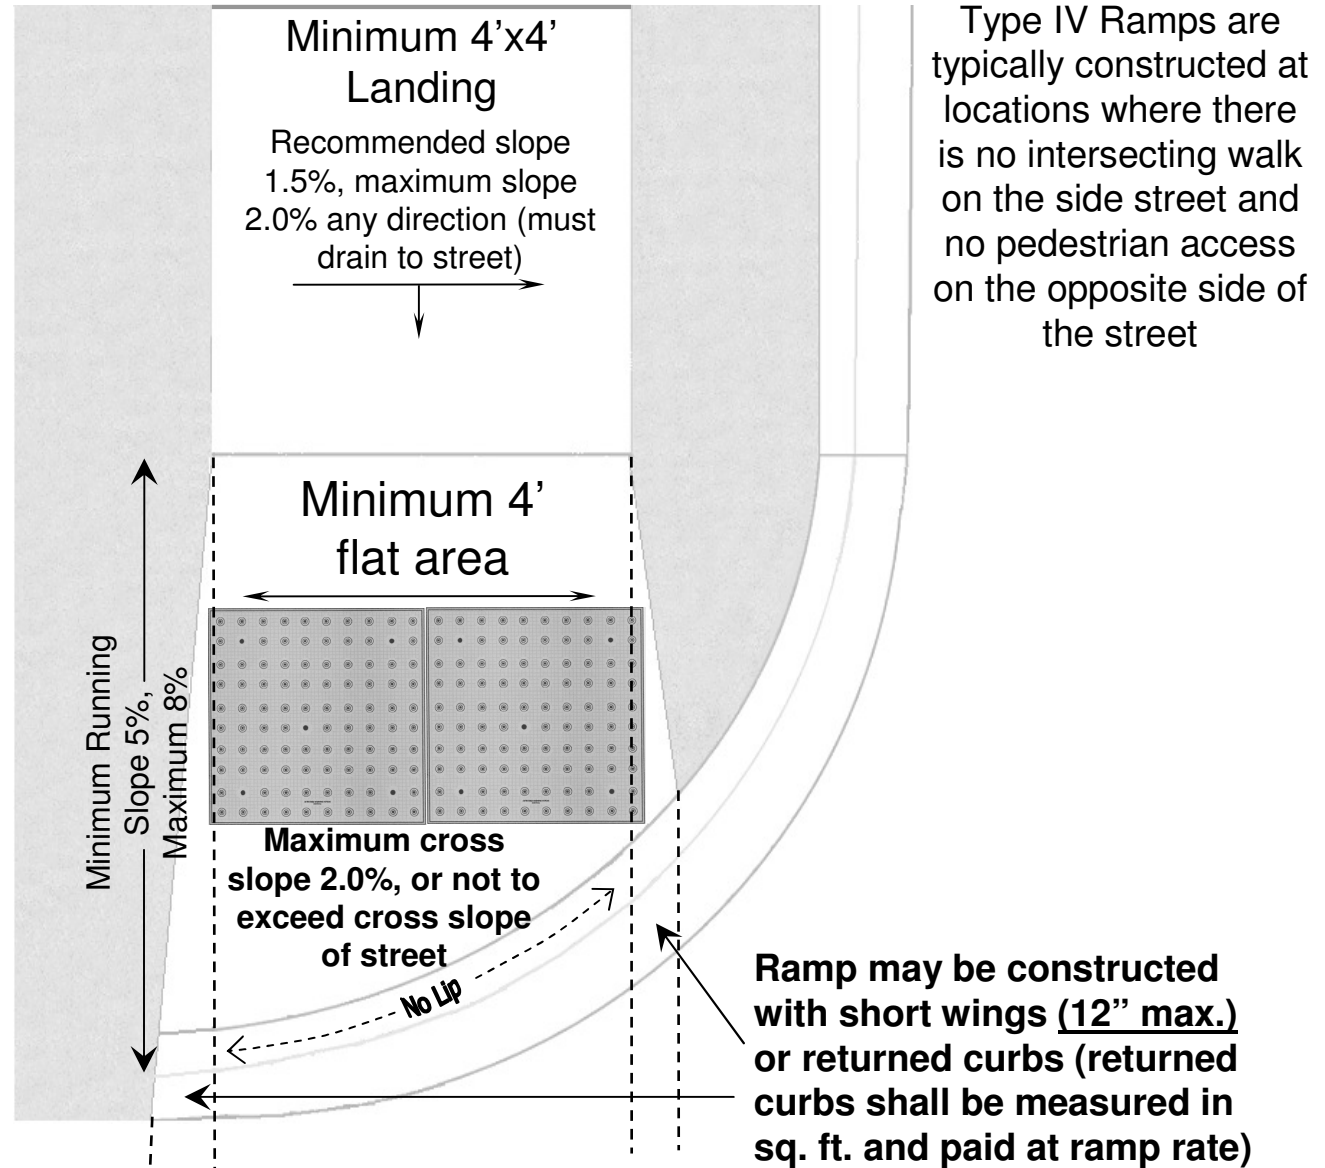

Type IV Ramps are typically constructed at locations where there is no intersecting walk on the side street and no pedestrian access on the opposite side of the street

Type IV - (Special Application)
Curb Ramp